



PAVEMENT REMOVAL DETAILS  
LONGITUDINAL SECTION

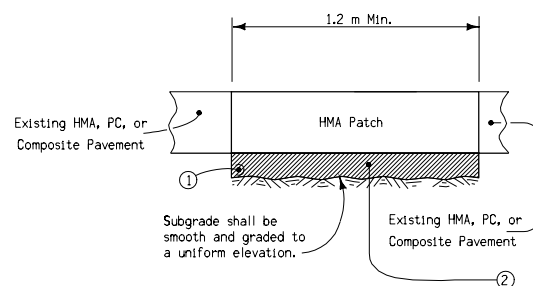


SECTION A-A

GENERAL NOTES:

- ① If longitudinal subdrain (shoulder) is not to be placed or if not present on the side of the roadway to be patched, then place 75 millimeter slotted corrugated pipe at low end of patch.
- ② 150 millimeter granular subbase if required by plan. When placed granular subbase should extend over longitudinal subdrain, if present.

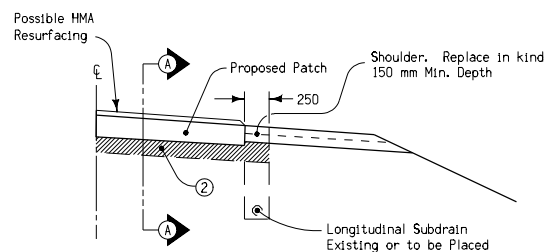



GRANULAR SUBBASE AND SUBDRAIN  
( WHEN REQUIRED BY PLAN )  
IF LONGITUDINAL SUBDRAIN IS PRESENT OR IS TO BE PLACED

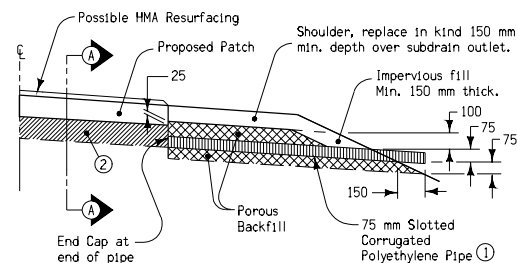

GRANULAR SUBBASE AND SUBDRAIN  
( WHEN REQUIRED BY PLAN )  
WITHOUT LONGITUDINAL SUBDRAIN

All dimensions given in millimeters unless noted.

METRIC VERSION	 Iowa Department of Transportation Highway Division	
	STANDARD ROAD PLAN	RR-10
	REVISION: NEW; Replaces Detail Sheet 532-1	REVISION NO. NEW
	 APPROVED BY DESIGN METHODS ENGINEER	REVISION DATE 04-30-02
	FULL DEPTH PATCH HOT MIX ASPHALT (EXISTING HMA, PC, OR COMPOSITE PAVEMENT)	